



本图纸为昆山福步工业设备有限公司财产，未经本单位许可不得复制或转给第三者。
This drawing is the property of FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO.,LTD.unauthorized disclosure to any third party or duplication is not permitted.

接口说明 Connection	
F	冲洗液接口
Q	急冷（吹扫）口
D	排液口

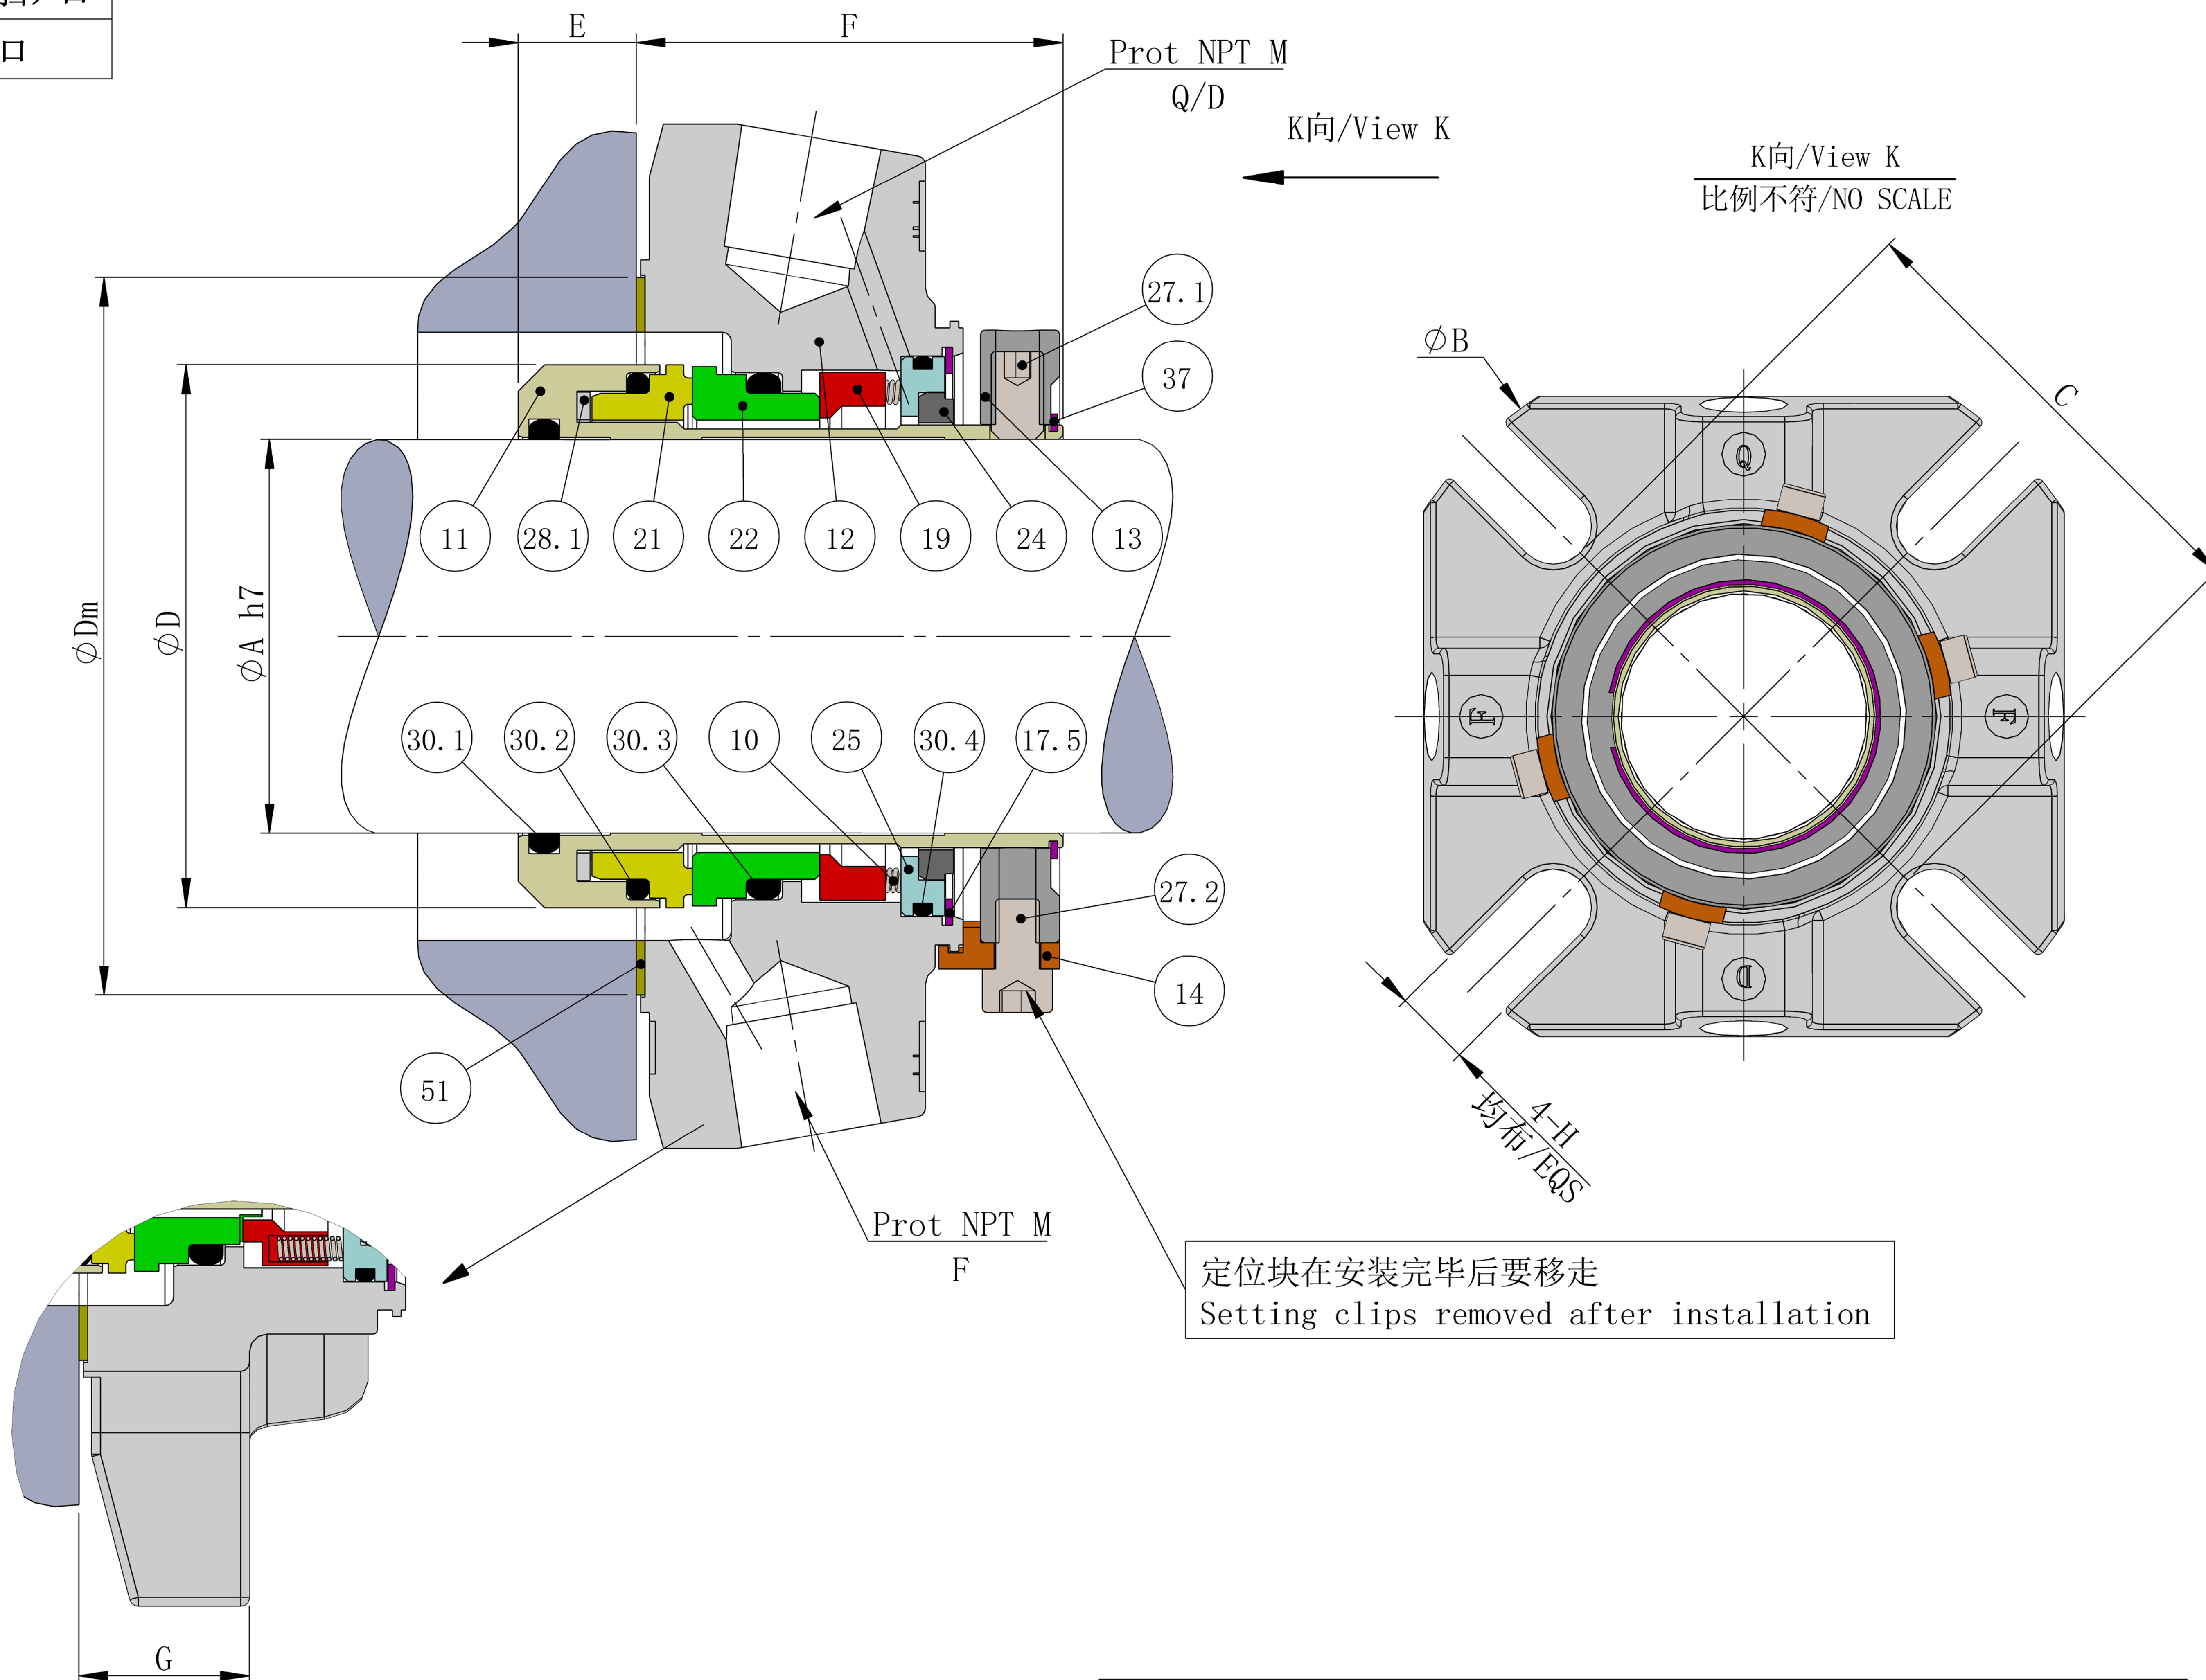

序号 No	零件名称 Description	材料 Material
11	轴套/Shaft Sleeve	316SS不锈钢/Stainless Steel
28.1	传动环/Driver Ring	316SS不锈钢/Stainless Steel
21	动环/Rotary Face	SSIC/TC
22	静环/Stationary Face	Carbon/SSIC/TC
12	压盖/Gland	316SS不锈钢/Stainless Steel
25	弹簧座/Spring Plate	316SS不锈钢/Stainless Steel
24	Bush 环/Bush Ring	M106K
13	定位环/Clamp Ring	316SS不锈钢/Stainless Steel
30.1	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.2	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
30.3	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
10	弹簧/Spring	Alloy 276
30.4	O型圈/O-Ring	EPR/Viton/Aflas/Kalrez
17.5	卡簧/Circlip	316SS不锈钢/Stainless Steel
27.1	驱动螺钉/Drive Screw	316SS不锈钢/Stainless Steel
37	卡簧/Circlip	316SS不锈钢/Stainless Steel
14	定位块/Setting Clip	铜/Brass
17.2	定位螺钉/Clip Screw	316SS不锈钢/Stainless Steel
51	垫片/Gasket	非石棉/AF1
19	推环/Thrust Ring	316SS不锈钢/Stainless Steel

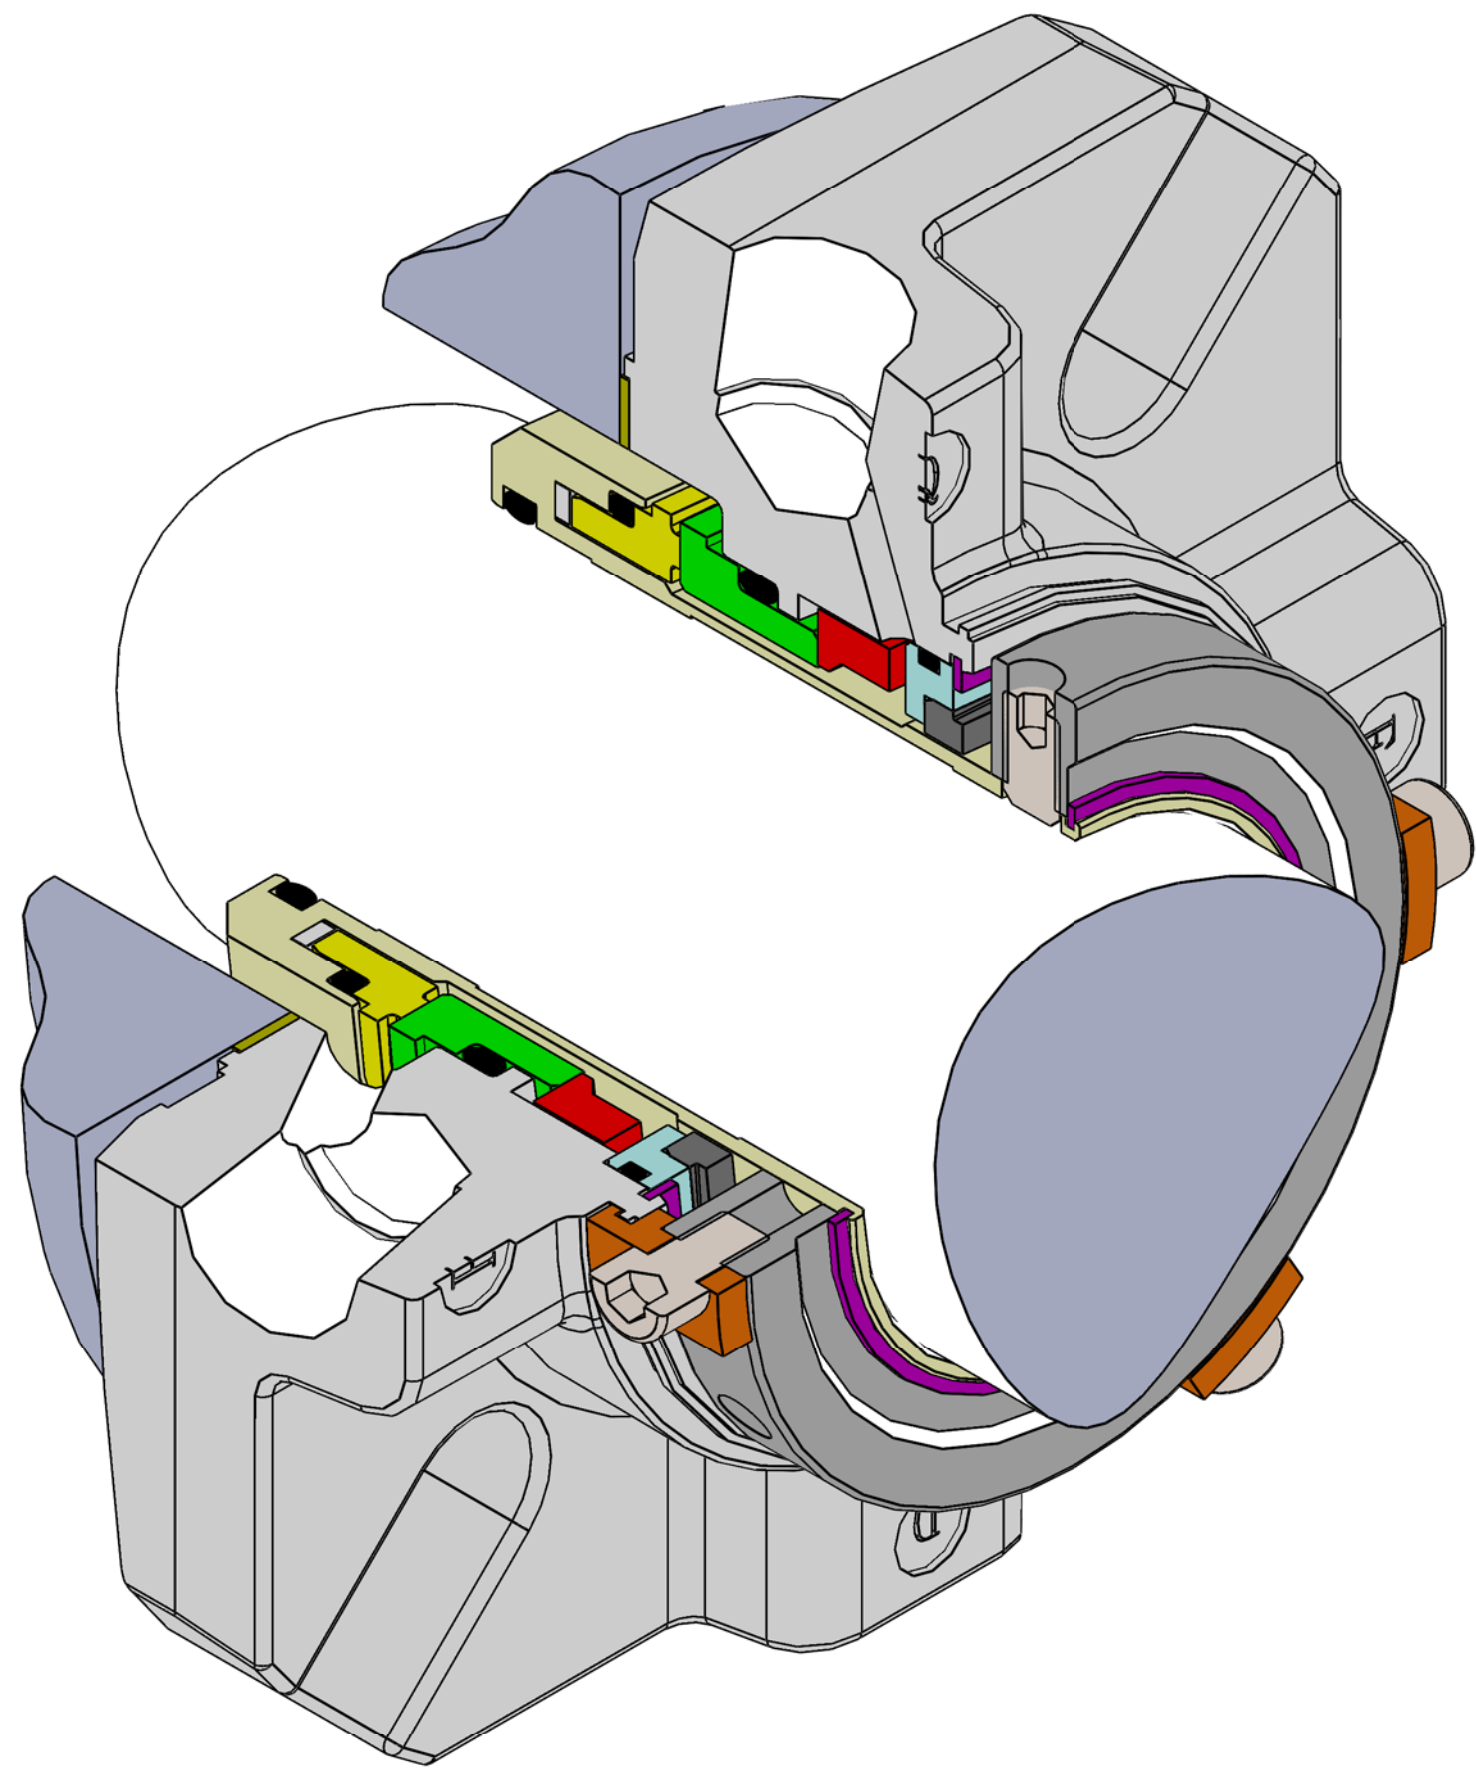

A	B	C	D	Dm	E	F	G	H	M
75	189.0	131.4	98.7	125.0	22.9	64.1	22.3	17.5	3/8"
80	201.0	142.5	105.1	137.0	22.9	64.1	22.3	21.0	3/8"
85	201.0	142.5	108.3	138.0	22.9	64.1	22.3	21.0	3/8"
90	214.6	152.0	114.6	146.0	22.9	64.1	44.0	21.0	3/8"
95	214.6	152.0	117.8	149.0	22.9	64.1	44.0	21.0	3/8"
100	227.3	155.2	124.1	150.0	22.9	64.1	44.0	21.0	3/8"

A	B	C	D	Dm	E	F	G	H	M
2.875	7.441	5.173	3.886	4.921	0.902	2.524	0.878	0.689	3/8"
3.000	7.441	5.173	3.886	4.921	0.902	2.524	0.878	0.689	3/8"
3.125	7.913	5.610	4.138	5.394	0.902	2.524	0.878	0.827	3/8"
3.250	7.913	5.610	4.138	5.394	0.902	2.524	0.878	0.827	3/8"
3.375	7.913	5.610	4.264	5.433	0.902	2.524	0.878	0.827	3/8"
3.500	8.449	5.984	4.512	5.748	0.902	2.524	1.732	0.827	3/8"
3.625	8.449	5.984	4.512	5.748	0.902	2.524	1.732	0.827	3/8"
3.750	8.449	5.984	4.638	5.787	0.902	2.524	1.732	0.827	3/8"
3.875	8.949	6.110	4.886	5.906	0.902	2.524	1.732	0.827	3/8"
4.000	8.949	6.110	4.886	5.906	0.902	2.524	1.732	0.827	3/8"

未注公差按照 General tolerance Per ISO 2768-m		名义尺寸 Nominal dimensions 公差 Tolerances		[mm] 0.5-6	>6-30	>30-120	>120-300	>400-1000	>1000-2000
Format/图幅 DIN EN ISO 216		A3	第一视角 Projection Method 1	 表面粗糙度表示方法符合 Method of indicating surface to		ISO1302 (μm)	公差符合 Tolerances according to	ISO 2768-m	
标记 NO.	处数 QTY	描述 Description	日期 Date	姓名 Name	 昆山福步工业设备有限公司 FBU INDUSTRIAL EQUIPMENT (KUNSHAN) CO., LTD.				
									
									
									
									
			设计 Design	日期 Date	姓名 Name	规格型号/TYPE NO. GSM (>70轴径)			质量/Weight 2471.85 g
			校核 Checked	2021/8/26					
			审核 Approved						
			公差带 Tolerance	比例 Scale	材料标记 Material Code				
			ISO 8015	1:1		图号/Drawing NO.			版本: Rev. A